

# RE8040-FEn440

# CSM<sup>®</sup>

Enhanced fouling resistant RO element for brackish water and wastewater reuse

- Fouling resistant
- High Permeate Flow and High Rejection
- Robustness and High Durability in a wide pH
- Extended effective membrane area



Industrial



Municipal



Water Reuse

## SPECIFICATIONS


### General Features

<b>Permeate Flow Rate</b>	12,000 GPD (45.4 m <sup>3</sup> /day)
<b>Nominal Salt Rejection</b>	99.7% (Minimum 99.5%)
<b>Effective Membrane Area</b>	440 ft <sup>2</sup> (40.9 m <sup>2</sup> )
<b>Membrane Type</b>	Thin-Film Composite
<b>Membrane Material</b>	Polyamide (PA)
<b>Element Configuration</b>	Spiral-Wound, FRP Wrapping

**Test Conditions:** 2,000 mg/L NaCl solution at 225 psig (1.55 MPa) applied pressure; 15% recovery; 77°F (25°C); pH 6.5–7.0; Permeate flow rate for each element may vary +25 / -15%.

### Dimensions and Weight

Model Name	A	B	C	Weight	Part Number	
					Inter-Connector	Brine Seal
RE8040-FEn440	40.0 inch (1,016 mm)	7.9 inch (200 mm)	1.125 inch (28.6 mm)	15kg	SWA01049	SWA01043

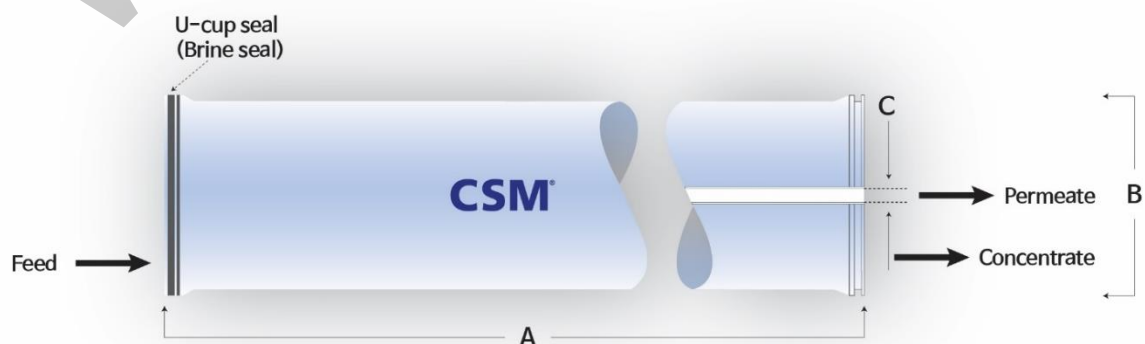

1. Each membrane element supplied with one interconnector (coupler) and four O-rings.
2. All RE8040 elements fit nominal 8.0 inch (203.2 mm) I.D. pressure vessels.

### Toray Advanced Materials Korea Inc.

For more information on our products, company and regional contacts, please visit our website at [www.csmfilter.com](http://www.csmfilter.com).  
Product Specification Sheet / Model RE8040-FEn440



# RE8040-FEn440

# CSM®

Enhanced fouling resistant RO element for brackish water and wastewater reuse

## APPLICATION DATA

### Operating Limits

<b>Max. Pressure Drop / Element</b>	15 psi (0.10 MPa)
<b>Max. Pressure Drop / 240" Vessel</b>	60 psi (0.41 MPa)
<b>Max. Operating Pressure</b>	600 psi (4.14 MPa)
<b>Max. Feed Flow Rate</b>	75 gpm (17.0 m <sup>3</sup> /hr)
<b>Min. Concentrate Flow Rate</b>	16 gpm (3.6 m <sup>3</sup> /hr)
<b>Max. Operating Temperature</b>	113°F (45°C)
<b>Operating pH Range</b>	2.0 – 11.0
<b>CIP pH Range</b>	1.0 – 13.0
<b>Max. Turbidity</b>	1.0 NTU
<b>Max. SDI (15 min)</b>	5.0
<b>Max. Chlorine Concentration</b>	< 0.1 mg/L

## GENERAL HANDLING PROCEDURES

- Elements contained in the boxes must be kept dry at room temperature (7–32°C; 40–95°F) and should not be stored in direct sunlight.
- For WET-TYPE, the preservative solution (1% sodium metabisulfite solution) is added to prohibit the growth of micro-organisms.
- Permeate from the first hour of operation should be discarded.
- Salt rejection would be stabilized within 48 hours of continuous operation depending on feedwater and operating conditions, but may take over a week for dry elements.
- Keep elements moist at all times after initial wetting.
- Avoid excessive pressure and flow spikes.
- Only use chemicals compatible with the membrane elements and components. Use of such chemicals may void the element limited warranty.
- Permeate pressure must always be equal or less than the feed/concentrate pressure. Damage caused by permeate back pressure voids the element limited warranty.
- The element shell is FRP(Fiber Reinforced Plastic). Be aware of glass fiber strands and use safety equipment.



Certified to  
NSF/ANSI/CAN 61

### Toray Advanced Materials Korea Inc.

For more information on our products, company and regional contacts, please visit our website  
Product Specification Sheet / Model RE8040-FEn440



PT Watermart Perkasa  
Email: sales@water.co.id Phone: +62-21-316-1671  
Whatsapp (text only): +62815-8609-3500  
Website: www.water.co.id